



 SAVING ENERGY, 
ONE BATH AT A TIME.

WITH ENERGY-EFFICIENT WATER HEATERS.

FASTER HEATING IN AN ENERGY-EFFICIENT PACKAGE

In the fast-paced world that confronts us, time is of the essence. We have none to waste. Which is why Orient Electric Water Heaters are designed to provide you with hot water in the fastest possible time, while ensuring the lowest possible electricity consumption.

With a wide range of 5-star rated offerings, Orient Electric has created a piece of technological genius designed to add comfort and ease to your lives.

Technology that stands out :

- IoT-enabled technology that gives you the liberty to operate your water heater from anywhere in the world.
- Ultra-diamond Glassline technology which ensures longer tank life, even in hard water conditions.
- Whirl-Flow technology which provides 20% more hot water output.
- Glassline heating element that ensures a seamless water heating experience.

'Safety first' is more than just a motto at Orient Electric. Which is why our water heaters ensure 100% protection with the best industry manufacturing processes and highest quality standards.

With a continuous focus on product quality and service, we have earned the trust and reached over 1,25,000 retail outlets. Our service network is going strong with a foothold in over 450 cities. Moreover, with a presence in over 40 countries worldwide and in all states across India, Orient Electric Ltd. is one of the oldest and most trusted brands in the electrical lifestyle solutions industry and has rightly earned the 'Superbrand' award on multiple occasions.



WHY ORIENT ELECTRIC WATER HEATERS?



Electricity Bill Savings

With a wide range of 5-star BEE rated models, Orient Electric water heaters go easy on your pocket and lend the perfect balance of heating efficiency coupled with electricity savings.



Safety

Orient Electric Water Heaters arrive with a 5-level safety shield and a high accuracy thermostat that provides maximum protection from overheating. A multifunction valve is used for protection against overpressure, vacuum and water backflow ensuring the utmost safety of your family.



Long-Lasting Performance

Built with shockproof Polymer material in the outer body and a Glassline-coated Incoloy heating element, Orient Electric water heaters ensure anti-scaling and last a lifetime. 27% thicker magnesium anode rod and an Ultra-Diamond Glassline tank ensure corrosion-proof operation, no matter the water conditions.



Wide Range

Orient Electric offers a wide range of storage, instant, gas, and immersion water heaters that spoil you for choice and fit your needs like a glove.



Style and Convenience

Orient Electric offers the perfect blend of aesthetics, performance, and convenience - made possible with color changing LED indicators, Glassline technology, and IoT. These technologies and features ensure that you get the best experience wrapped in a stylish package.



After Sales Support

We stand by our products and customers by offering comprehensive after-sales support and free installation on the Glassline water heater.

STORAGE RANGE OF WATER HEATERS

Glassline Water Heaters



Aquator+ IoT



Aquator+



Fontus Quad+



Evapro+ PC




Aquanaut+



URJA+



PRITHVI+

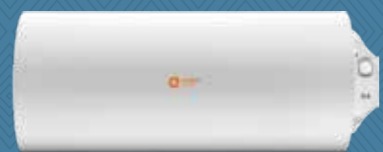

Thermoslim

HPE Technology Water Heater



Maverick+

Stainless Steel Water Heaters



Fontus+



Aquaspa+



Ecoswift+

INSTANT WATER HEATERS



Rapidus



Aura Plus



Primus



Revatto



Fontus

GAS WATER HEATER



Orient Bahubali

IMMERSION RODS



Arc Plus



Hot Star

CONNECTING PIPE



THE WHAT, WHY, AND HOW OF BUYING A WATER HEATER

Water Heater Buying Guide

Type	Capacity (Litre)	Family Size	Application/Usage
Instant Water Heater	1-3 Litre	1-2 members	<ul style="list-style-type: none"> • Kitchen • Wash - Basin
	5.5 Litre	1-3 members	<ul style="list-style-type: none"> • Kitchen • Wash - Basin • Bucket
Gas Water Heater	6	1-4 members	<ul style="list-style-type: none"> • Kitchen • Ventilated Bathroom - Bucket
Storage Water Heater	6 -10 Litre	2-3 members	Bathroom - Bucket
	15 - 25 Litre	2-4 members	Bathroom - Shower, Bucket
	35 - 50 Litre	2-5 members	Bathroom - Bathtub, Shower, Bucket
	70 - 100 Litre	2-8 members	Bathroom - Bathtub, Shower, Bucket
Immersion Water Heater	1/1.5 kW Immersion	1 member	Bucket

Water Type

Hard water contains high levels of mineral salts like Calcium and Magnesium. The minerals present in the hard water can cause scaling. Over a period of time, it starts interfering with the efficiency of the water heaters. In hard water conditions, choose water heaters with glassline coated tank, Nano Polymer tank and glassline heating heating element, anti-scale devices like magnesium anode rod, which prevent corrosion and scaling, thus enhancing tank life.

Pressure Pump Compatibility and Safety

If you live in a high-rise building, then consider rated pressure of at least 8-bar and ensure that your water heater has a pressure release valve for safety which releases over pressured water to avoid tank damage.

Orient Water heaters arrives with the revolutionary IoT technology that gives you the comfort to operate from anywhere in the world.

CUSTOMIZE AS PER YOUR NEEDS

The Manual Mode allows you to customize and save temperature settings for the specific needs of different family members.


SAVE TIME

The Smart Mode sets the highest temperature as default to ensure fast-heating and quick availability of hot water.

TRACK YOUR ELECTRICITY BILL

The usage analysis option analyses the power-consumption trend of the water heater on a daily, weekly, and monthly basis.

Download the Orient Smart app

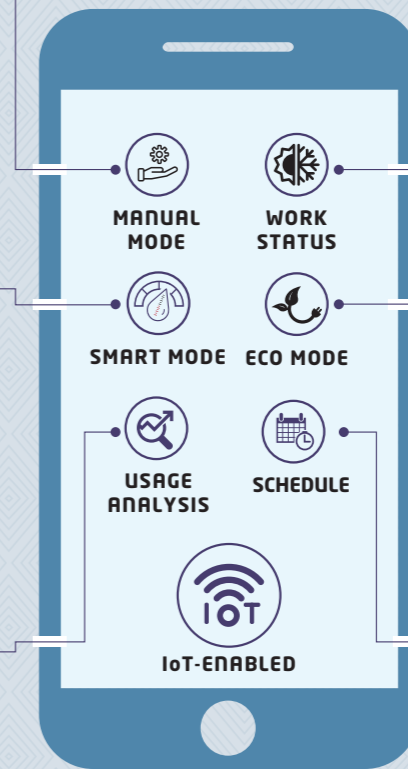

CHECK REAL-TIME WORKING STATUS

The work status option reflects the real-time working status of the water heater.

SAVE ELECTRICITY

The Eco mode sets the optimal temperature for conserving energy; while ensuring that the water stays warm.

SET YOUR TIMER

The schedule option automatically switches your water heater On and OFF at the required temperature for a better bathing experience.



Storage Water Heaters

Glassline Storage Water Heater

Add a touch of comfort and convenience to your life with the wide range of Ultra Diamond Glassline coated and BEE 5-star rated Orient Electric water heaters. The Ultra-Diamond Glassline coated tank and heating element provides excellent corrosion resistance and makes it suitable for high-rise buildings. Available in various designs and capacities to suit your aesthetic preferences, evolving needs, and environments, these water heaters are the perfect fit for your washroom! In addition to that a bunch of safety features, premium manufacturing quality, suitable for high-rise applications, and energy efficiency - and you've got yourself the complete package! To top it all off, the in-built IoT technology lets you remotely operate your water heaters from anywhere you want!

HPE Technology Water Heater

The HPE Technology Water Heaters arrive with a high-strength, Nano-Polymer coated tank which makes them ideal for hard water conditions. Add to that a body that is corrosion resistant, shock-proof, and splash-proof - and you've got yourself the complete package. Suitable for high-rise buildings, these water heaters are as safe as they come.

Stainless Steel Storage Tank

Orient Electric storage water heaters are thoughtfully designed for your home. Arriving with a high-quality build and a superior heating element, these water heaters are made to withstand the test of time and are compatible with only low and mid-rise buildings. And with an added promise of a warranty, you can rest assured that nothing will keep you away from a refreshing experience.



STORAGE GLASSLINE

AQUATOR+ IoT



SWAT06VPG8I2-BS (6L) | SWAT10VPG8I2-BS (10L)
SWAT15VPG8I2-BS (15L) | SWAT25VPG8I2-BS (25L)

-  **Liberty to operate from anywhere** with IoT-Enabled operation
-  **Saves time** with Smart Mode which sets highest temperature as default
-  **Easy operation** with Soft Touch Control
-  **40% Longer tank lifespan** with Ultra-Diamond Glassline Tank
-  **Good corrosion resistance & extended life** with 27% thicker Magnesium Anode Rod & Nickel coated heavy Copper heating element
-  **Suitable for high-rise buildings** with pressure compatibility upto 8 bar
-  **10% Longer heat retention** with thick PUF insulation
-  **Warranty:** 7 year on Tank, 4* year on Heating Element, 2 year on Product
-  **Saves electricity** with Eco Mode which sets optimum temperature to conserve energy while keeping the water warm
-  **Temperature indication** with Digital Display
-  **Power & heating indication** with colour changing Smart LED
-  **20% More hot water output** with Whirlflow technology
-  **Shock-proof & Splash-Proof** with IPX4 High-strength Polymer Body
-  **Enhanced safety** with Multifunction Valve
-  **Better load efficiency** with Moulded 3-Pin Plug

AQUATOR+



SWAT06VPG8K2-WS (6L) | SWAT10VPG8K2-WS (10L)
SWAT15VPG8K2-WS (15L) | SWAT25VPG8K2-WS (25L)

-  **Stylish & sophisticated** look with chrome trim and designer body
-  **20% more hot water output** with Whirlflow technology
-  **Shock-proof & Splash-Proof** with IPX4 High-strength Polymer Body
-  **Set temperature according to your need** with customized temperature setting
-  **Enhanced safety** with Multifunction Valve
-  **Better load efficiency** with Moulded 3-Pin Plug
-  **40% Longer tank lifespan** with Ultra-Diamond Glassline Tank
-  **Good corrosion resistance & extended life** with 27% thicker Magnesium Anode Rod & Nickel coated heavy Copper heating element
-  **Suitable for high-rise buildings** with pressure compatibility upto 8 bar
-  **Power & heating indication** with colour changing Smart LED
-  **10% Longer heat retention** with thick PUF insulation
-  **Warranty:** 7 year on Tank, 4* year on Heating Element, 2 year on Product

FONTUS QUAD+



SWFQ10VPG8K2-WS (10L) | SWFQ15VPG8K2-WS (15L)
SWFQ25VPG8K2-WS (25L)

- 40% Longer tank lifespan** with Ultra-Diamond Glassline Tank
- 20% More hot water output** with Whirlflow technology
- Shock-proof & Splash-Proof** with IPX1 High-strength Polymer Body
- Set temperature according to your need** with customized temperature setting
- 10% Longer heat retention** with thick PUF insulation
- Warranty:** 7 year on Tank, 4 year on Heating Element, 2 year on Product
- Power & heating indication** with colour changing Smart LED
- Good corrosion resistance & extended life** with 27% thicker Magnesium Anode Rod & Nickel coated heavy Copper heating element
- Suitable for high-rise buildings** with pressure compatibility upto 8 bar
- Enhanced safety** with Multifunction Valve
- Better load efficiency** with Moulded 3-Pin Plug



AQUANAUT+



SWAN06VPG8K2-WG (6L) | SWAN10VPG8K2-WG (10L)
SWAN15VPG8K2-WG (15L) | SWAN25VPG8K2-WG (25L)
SWAN35VPG8K2-WG (35L) | SWAN50VPG8K2-WG (50L)
SWAN70VPG8K3-WG (70L) | SWAN1XVPG8K3-WG (100L)

- 40% Longer tank lifespan** with Ultra-Diamond Glassline Tank
- 20% More hot water output** with Whirlflow technology
- Suitable for high-rise buildings** with pressure compatibility upto 8 bar
- Set temperature according to your need** with customized temperature setting
- 10% Longer heat retention** with thick PUF insulation
- Warranty:** 7 year on Tank, 3 year on Heating Element, 2 year on Product
- Good corrosion resistance & extended life** with 27% thicker Magnesium Anode Rod & Nickel coated heavy Copper heating element
- Shock-proof & Splash-Proof** with IPX2 High-strength Polymer Body
- Enhanced safety** with Multifunction Valve
- Temperature indication** with Dial display
- Better load efficiency** with Moulded 3-Pin Plug



70L and 100L available in 3 star rating.

EVAPRO+ PC



SWEV06VCG8K2-SL (6L) | SWEV10VCG8K2-SL (10L)
SWEV15VCG8K2-SL (15L) | SWEV25VCG8K2-SL (25L)

- Stylish & sophisticated look** with designer body styling
- Good corrosion resistance & extended life** with 27% thicker Magnesium anode rod and glassline heating element
- Suitable for high-rise buildings** with pressure compatibility upto 8 bar
- Enhanced safety** with Multifunction Valve
- Better load efficiency** with Moulded 3-Pin Plug
- 40% Longer tank lifespan** with Ultra-Diamond Glassline Tank
- Rust-Resistant & Splash-Proof** with IPX1 Pre-coated Metal Body
- Set temperature according to your need** with customized temperature setting
- 10% Longer heat retention** with thick PUF insulation
- Warranty:** 7 year on Tank, 3 year on Heating Element, 2 year on Product



URJA+®



SWUR06VCG8K2-WK (6L) | SWUR10VCG8K2-WK (10L)
SWUR15VCG8K2-WK (15L) | SWUR25VCG8K2-WK (25L)

- Stylish & sophisticated look** with designer body styling
- Good corrosion resistance & extended life** with 27% thicker Magnesium Anode Rod & Nickel coated heavy Copper heating element
- Rust-Resistant & Splash-Proof** with IPX4 Powder-coated Metal Body
- Temperature indication** with Dial display
- Enhanced safety** with Multifunction Valve
- Warranty:** 7 year on Tank, 3 year on Heating Element, 2 year on Product
- 40% Longer tank lifespan** with Ultra-Diamond Glassline Tank
- 20% More hot water output** with Whirlflow technology
- Suitable for high-rise buildings** with pressure compatibility upto 8 bar
- 10% Longer heat retention** with thick PUF insulation
- Better load efficiency** with Moulded 3-Pin Plug



Features might slightly vary as per the capacity. Please refer to the spec table for more details.

Features might slightly vary as per the capacity. Please refer to the spec table for more details.

THERMOSLIM



SWTP10HPGM2-LH (10L) | SWTP10HPGM2-RH (10L)
 SWTP15HPGM2-LH (15L) | SWTP15HPGM2-RH (15L)
 SWTP25HPGM2-LH (25L) | SWTP25HPGM2-RH (25L)
 SWTP50HMG2-CM (50L)



- Suitable for hidden fittings/ constrained spaces with horizontal mounting design
- 40% Longer tank lifespan with Ultra-Diamond Glassline Tank
- Good corrosion resistance & extended life with 27% thicker Magnesium Anode rod & Nickel coated heavy Copper heating element
- Rust-Resistant & Splash-Proof with IPX4 Powder-coated Metal Body
- Suitable for high-rise buildings with pressure compatibility upto 8 bar
- Enhanced safety with Multifunction Valve
- 10% Longer heat retention with thick PUF insulation
- Better load efficiency with Moulded 3-Pin Plug
- Set temperature according to your need with customized temperature setting
- Mounting for 10/15/25 L in LHS/RHS & 50 L in centre mounting
- Warranty: 7 year on Tank, 3 year on Heating Element, 2 year on Product

Image shown is for RHS variant.

MAVERICK+



SWMA06VMP8K2-GB(6L) | SWMA10VMP8K2-GB (10L)
 SWMA15VMP8K2-GB (15L) | SWMA25VMP8K2-GB (25L)
 SWBA35VMGM2 (35L) | SWBA50VMGM2 (50 L)



- Sophisticated Design with powder coated metal body designer service cover and premium chrome logo
- Longer Tank Lifespan with HPE technology
- Good corrosion resistance & extended life with 27% thicker Magnesium Anode Rod & Nickel coated heavy Copper heating element
- 20% More hot water output with Whirlflow technology
- Shock-proof & Splash-Proof with IPX2 Pre-Coated Metal Body
- Suitable for high-rise buildings with pressure compatibility upto 8 bar
- Enhanced safety with Multifunction Valve
- 10% Longer heat retention with thick PUF insulation
- Better load efficiency with Moulded 3-Pin Plug
- Set temperature according to your need with customized temperature setting
- Free Installation available at all existing Free Installation Pin Codes
- Warranty: 5 year on Tank, 2 year on Heating Element, 2 year on Product

35L and 50L available in 3 star rating.

STORAGE STAINLESS STEEL TANK

PRITHVI+



SWPR06VCG8M2-WG (6L) | SWPR10VCG8M2-WG (10L)
 SWPR15VCG8M2-WG (15L) | SWPR25VCG8M2-WG (25L)



- Stylish & sophisticated look with designer body styling
- 40% Longer tank lifespan with Ultra-Diamond Glassline Coated Tank
- Good corrosion resistance & extended life with 27% thicker Magnesium Anode Rod & Nickel coated heavy Copper heating element
- Rust-Resistant & Splash-Proof with Powder-coated IPX1 Metal Body
- Suitable for high-rise buildings with pressure compatibility upto 8 bar
- Enhanced safety with Multifunction Valve
- 10% Longer heat retention with thick PUF insulation
- Better load efficiency with Moulded 3-Pin Plug
- Warranty: 7 year on Tank, 3 year on Heating Element, 2 year on Product

Features might slightly vary as per the capacity. Please refer to the spec table for more details.

FONTUS+



SWFT10VPS6K2-WW (10L) | SWFT15VPS6K2-WW (15L)
 SWFT25VPS6K2-WW (25L)



- Longer tank lifespan with High-Grade Stainless Steel Tank
- Faster Heating with Heavy Copper Heating Element
- Shock-proof & Splash-Proof with IPX2 High-strength Polymer Body
- Suitable for low & mid-rise buildings with pressure compatibility upto 6.5 bar pressure
- 10% Longer heat retention with thick PUF insulation
- Enhanced safety with Pressure Release Valve & Anti-siphon hole
- Warranty: 5 year on Tank, 2 year on Heating Element, 2 year on Product

Image are representative purpose only for actual sizes please contact to dealers

STORAGE STAINLESS STEEL TANK



ECOSWIFT+



SWEF06VMS6M2-WB (6L) | SWEF10VMS6M2-WB (10L)
SWEF15VMS6M2-WB (15L) | SWEF25VMS6M2-WB (25L)

- Longer tank lifespan** with High-Grade Stainless Steel Tank
- Shock-Resistant & Splash-Proof** with IPX2 High-strength Polymer Body
- 10% Longer heat retention** with thick PUF insulation
- Warranty:** 5 year on Tank, 2 year on Heating Element, 2 year on Product
- Faster Heating** with Heavy Copper Heating Element
- Suitable for low & mid-rise buildings** with pressure compatibility upto 6.5 bar pressure
- Enhanced safety** with Pressure Release Valve & Anti-siphon hole



INSTANT WATER HEATERS

Get used to instant hot water with Orient Electric's wide range of instant water heaters and the industry's first-ever 5.5 Litre instant water heater i.e., Rapidus. The perfect blend of elegance and technology, these water heaters are an ideal match for your kitchen, office pantry, bathrooms, and more. But what makes them unique is a shock-proof high strength Polymer body, stainless steel tank, pressure bearing capacity up to 8 bar, and glass wool insulation. And the list goes on and on and on! The only thing left to do is decide which instant water heater you want!



AQUASPA+



SWAA06VPS6M2-WG (6L)

- Longer tank lifespan** with High-Grade Stainless Steel Tank
- Shock-proof & Splash-Proof** with IPX2 High-strength Polymer Body
- 10% Longer heat retention** with thick PUF insulation
- Warranty:** 5 year on Tank, 2 year on Heating Element, 2 year on Product
- Faster Heating** with Heavy Copper Heating Element
- Suitable for low & mid-rise buildings** with pressure compatibility upto 6.5 bar pressure
- Enhanced safety** with Pressure Release Valve & Anti-siphon hole



RAPIDUS



IWRP55VPS6M3-WB (5.5L, 3 kW)

- Industry first 5.5 L** capacity Instant Water Heater
- Faster Heating** with Heavy Copper Heating Element
- Power & heating indication** with Neon Indicator
- Better load efficiency** with Moulded 3-Pin Plug
- Longer heat retention** with Glass Wool Insulation
- Longer tank lifespan** with High-Grade Stainless-Steel Tank
- Shock-proof & Splash-Proof** with IPX2 High-strength Polymer Body
- Suitable for low & mid-rise buildings** with pressure compatibility upto 6.5 bar pressure
- Enhanced safety** with Pressure Release Valve & Anti-siphon hole
- Warranty:** 5 year on Tank, 2 year on Heating Element, 2 year on Product

PRIMUS



IWPM03VPS8M3-WW (3L, 3kW)

- Elegant & shock-proof** with High-strength Polymer Body
- Longer tank lifespan** with High-Grade Stainless-Steel Tank
- Suitable for high rise buildings** with pressure compatibility up to 8 bar pressure
- Enhanced safety** with Pressure Release Valve & Anti-siphon hole
- Warranty:** 5 year on Tank, 2 year on Heating Element, 2 year on Product
- Better load efficiency** with Moulded 3-Pin Plug
- Faster Heating** with Heavy Copper Heating Element
- Power & heating indication** with Neon Indicator
- Longer heat retention** with Glass wool Insulation

FONTUS



IWFT03VPS6M3-WW (3L, 3kW)

- Longer tank lifespan** with High-Grade Stainless Steel Tank
- Shock-proof & rust-proof** with high-strength Polymer body
- Suitable for low & mid-rise buildings** with pressure compatibility upto 6.5 bar pressure
- Longer heat retention** with Glass wool Insulation
- Faster Heating** with Heavy Copper Heating Element
- Power & heating indication** with Neon Indicator
- Enhanced safety** with Pressure Release Valve & Anti-siphon hole
- Warranty:** 5 year on Tank, 2 year on Heating Element, 2 year on Product

AURA PLUS



IWAU03VPS8M3-WG | IWAU03VPS8M4-WG
IWAU01VPS8M3-WG | IWAU01VPS8M4-WG

- Power & heating indication** with LED Indicator
- Faster Heating** with Heavy Copper Heating Element
- Suitable for high-rise buildings** with pressure compatibility upto 8 bar pressure
- Longer heat retention** with Glass wool Insulation
- Warranty:** 5 year on Tank, 2 year on Heating Element, 2 year on Product
- Longer tank lifespan** with High-Grade Stainless Steel Tank
- Shock-proof & rust-proof** with high-strength Polymer body
- Enhanced safety** with Pressure Release Valve & Anti-siphon hole
- Better load efficiency** with Moulded 3-Pin Plug

REVATTO



IWRV03VPS6M3-WW (3L, 3kW)

- Longer tank lifespan** with High-Grade Stainless Steel Tank
- Shock-proof & rust-proof** with high-strength Polymer body
- Suitable for low & mid-rise buildings** with pressure compatibility upto 6.5 bar pressure
- Longer heat retention** with Glass wool Insulation
- Faster Heating** with Heavy Copper Heating Element
- Power & heating indication** with Neon Indicator
- Enhanced safety** with Pressure Release Valve & Anti-siphon hole
- Warranty:** 5 year on Tank, 2 year on Heating Element, 2 year on Product

GAS WATER HEATER

Planning to save some money on your water heating electricity bills? Bring home Orient Electric's flagship gas water heater - Orient Bahubali. Designed to heat water instantly while saving up on electricity bills with a gas-based operational system, Orient Bahubali has a sleek design that blends seamlessly with your interiors. And the best part about it? It's safer than a seatbelt! Get busy saving with Orient Bahubali!



ARC PLUS



IM10AP | IM15AP

100% Shock-proof body with IPX7 protection

Faster Heating with Heavy Copper Heating Element

Easy maneuvering handle with firm grip

Assured quality with ISI Certified Product

Uniform heating with Spiral design heating element

Easy & safe usage with Bucket Clip

Better load efficiency with 3-Pin Moulded plug

Replacement warranty 2 year on product

HOT STAR



IM10HS | IM15HS

Uniform heating with Spiral design heating element

Power & heating indication with Neon Indicator

Easy maneuvering handle with firm grip

Assured quality with ISI Certified Product

Faster Heating with Heavy Copper Heating Element

Easy & safe usage with Bucket Clip

Better load efficiency with 3-Pin Moulded plug

Replacement warranty 2 year on product

ORIENT BAHUBALI



GWBB06VML8KN-WG (6L)

Faster heating with 3-Row burner with double ignition & Tin-plated Heavy Copper Heat Exchanger

Enhanced safety with flame failure device, Auto 20-min Off timer, Overheat & Over-pressure protection

Shuts off ignition during improper usage through Safety Lock

Assured quality with ISI Certified Product

Heat water as per the climate with Summer-Winter Mode

Prompts to replace battery through Low Battery Indicator

Suitable for high-rise buildings with pressure compatibility upto 8 bar

Warranty: 2-year on product

Features might slightly vary as per the capacity. Please refer to the spec table for more details.

CONNECTING PIPE



WF1001P061 (450mm) | WF1001P050 (450mm)
WH-PIPE-SET (450 mm)

External protection & pressure resistance with SS304 High-grade stainless steel braiding

Leak-proof with SS304 High-grade stainless Steel crimp & NBR seals

Suitable to withstand high temperature with EPDM rubber

Flexible design for convenience

Rust-proof with High-grade stainless steel nut

Suitable to withstand high pressure upto 12 bars

Suitable for both hot & cold water

Image are representative purpose only for actual sizes please contact to dealers.



AQUATOR+ IoT



AQUATOR+

Category	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	
Model	Aquator+ IoT	Aquator+ IoT	Aquator+ IoT	Aquator+ IoT	Aquator+	Aquator+	Aquator+	
Model No.	SWAT06VPG8I2-BS	SWAT10VPG8I2-BS	SWAT15VPG8I2-BS	SWAT25VPG8I2-BS	SWAT06VPG8K2-WS	SWAT10VPG8K2-WS	SWAT15VPG8K2-WS SWAT25VPG8K2-WS	
Mounting Position	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	
Capacity (L)	6	10	15	25	6	10	15/25	
BEE Star Rating	5	5	5	5	5	5	5	
Rated Input Power (kW)	2	2	2	2	2	2	2	
Outer Body	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	
Inner Tank	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	
Heating Element	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Glassline Coated Incoloy	Glassline Coated Incoloy	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Glassline Coated Incoloy	
Device Control	Control Panel / Mobile App	Control Panel / Mobile App	Control Panel / Mobile App	Control Panel / Mobile App	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	
Function Display	Digital Display	Digital Display	Digital Display	Digital Display	N.A.	N.A.	N.A.	
Power & Heating Indicator	LED	LED	LED	LED	LED	LED	LED	
Tank Heat Loss Insulation	PUF	PUF	PUF	PUF	PUF	PUF	PUF	
Tank Anti-Rust Device	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	
Max Pressure Rating (Bar)	8	8	8	8	8	8	8	
Primary Overheat Protection	Electronic Relay	Electronic Relay	Electronic Relay	Electronic Relay	Thermostat	Thermostat	Thermostat	
Secondary Overheat Protection	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	
MFV (Over Pressure Protection)	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	
MFV (Vacuum Protection)	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	
MFV (Water Backflow Protection)	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	
MFV (Tank Maintenance)	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	
Ingress Protection Rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	
Available Colours	Aqua blue-Silver	Aqua blue-Silver	Aqua blue-Silver	Aqua blue-Silver	White-Silver	White-Silver	White-Silver	
Dimension (mm)	Width	325	365	390	470	325	365	390/470
	Depth	315	340	385	400	315	340	385/400
	Height	325	365	390	470	325	365	390/470
Warranty (year)	Product	2	2	2	2	2	2	2
	Element	3	3	4	4	3	3	4
	Tank	7	7	7	7	7	7	7



FONTUS QUAD+



EVAPRO+ PC

Category	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	
Model	Fotnus Quad+	Fotnus Quad+	Fotnus Quad+	Evapro+ PC	Evapro+ PC	Evapro+ PC	Evapro+ PC	
Model No.	SWFQ10VPG8K2-WS	SWFQ15VPG8K2-WS	SWFQ25VPG8K2-WS	SWEV06VCG8K2-SL	SWEV10VCG8K2-SL	SWEV15VCG8K2-SL	SWEV25VCG8K2-SL	
Mounting Position	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	
Capacity (L)	10	15	25	6	10	15	25	
BEE Star Rating	5	5	5	5	5	5	5	
Rated Input Power (kW)	2	2	2	2	2	2	2	
Outer Body	High-strength Polymer	High-strength Polymer	High-strength Polymer	Pre-coated Designer Metal	Pre-coated Designer Metal	Pre-coated Designer Metal	Pre-coated Designer Metal	
Inner Tank	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	
Heating Element	Glassline Coated Incoloy	Glassline Coated Incoloy	Glassline Coated Incoloy	Glassline Coated Incoloy	Glassline Coated Incoloy	Glassline Coated Incoloy	Glassline Coated Incoloy	
Device Control	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	
Function Display	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	
Power & Heating Indicator	LED	LED	LED	Neon	Neon	Neon	Neon	
Tank Heat Loss Insulation	PUF	PUF	PUF	PUF	PUF	PUF	PUF	
Tank Anti-Rust Device	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	
Max Pressure Rating (Bar)	8	8	8	8	8	8	8	
Primary Overheat Protection	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	
Secondary Overheat Protection	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	
MFV (Over Pressure Protection)	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	
MFV (Vacuum Protection)	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	
MFV (Water Backflow Protection)	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	
MFV (Tank Maintenance)	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	
Ingress Protection Rating	IPX1	IPX1	IPX1	IPX1	IPX1	IPX1	IPX1	
Available Colours	White	White	White	Silver	Silver	Silver	Silver	
Dimension (mm)	Width	360	397	445	275	330	330	375
	Depth	285	315	368	265	320	320	360
	Height	393	430	485	385	415	490	580
Warranty (year)	Product	2	2	2	2	2	2	
	Element	4	4	4	3	3	3	
	Tank	7	7	7	7	7	7	



AQUANAUT+

Category	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)
Model	Aquanaut+	Aquanaut+	Aquanaut+	Aquanaut+	Aquanaut+	Aquanaut+	Aquanaut+	Aquanaut+
Model No.	SWAN06VPG8K2-WG	SWAN10VPG8K2-WG	SWAN15VPG8K2-WG	SWAN25VPG8K2-WG	SWAN35VPG8K2-WG	SWAN50VPG8K2-WG	SWAN70VPG8K3-WG	SWAN1XVPG8K3-WG
Mounting Position	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Capacity (L)	6	10	15	25	35	50	70	100
BEE Star Rating	5	5	5	5	5	5	3	3
Rated Input Power (kW)	2	2	2	2	2	2	3	3
Outer Body	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer
Inner Tank	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel
Heating Element	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat
Device Control	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob
Function Display	Temperature Dial	Temperature Dial	Temperature Dial	Temperature Dial	Temperature Dial	Temperature Dial	Temperature Dial	Temperature Dial
Power & Heating Indicator	LED	LED	LED	LED	LED	LED	LED	LED
Tank Heat Loss Insulation	PUF	PUF	PUF	PUF	PUF	PUF	PUF	PUF
Tank Anti-Rust Device	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod
Max Pressure Rating (Bar)	8	8	8	8	8	8	8	8
Primary Overheat Protection	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Secondary Overheat Protection	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout
MFV (Over Pressure Protection)	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve
MFV (Vacuum Protection)	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve
MFV (Water Backflow Protection)	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve
MFV (Tank Maintenance)	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve
Ingress Protection Rating	IPX2	IPX2	IPX2	IPX2	IPX2	IPX2	IPX2	IPX2
Available Colours	White	White	White	White	White	White	White	White
Dimension (mm)	Width	285	355	355	375	475	475	460
	Depth	270	340	340	360	460	460	460
	Height	380	422	520	593	560	680	855
Warranty (year)	Product	2	2	2	2	2	2	2
	Element	3	3	3	3	3	3	3
	Tank	7	7	7	7	7	7	7



URJA+



PRITHVI+

Category	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)	Storage (Glassline)
Model	Urja+	Urja+	Urja+	Urja+	Prithvi +	Prithvi +	Prithvi +	Prithvi +
Model No.	SWUR06VCG8K2-WK	SWUR10VCG8K2-WK	SWUR25VCG8K2-WK	SWUR15VCG8K2-WK	SWPR06VCG8M2-WG	SWPR10VCG8M2-WG	SWPR15VCG8M2-WG	SWPR25VCG8M2-WG
Mounting Position	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Capacity (L)	6	10	15	25	6	10	15	25
BEE Star Rating	4	4	4	4	3	3	3	3
Rated Input Power (kW)	2	2	2	2	2	2	2	2
Outer Body	Pre Coated Metal	Pre Coated Metal	Pre Coated Metal	Pre Coated Metal	Pre Coated Metal	Pre Coated Metal	Pre Coated Metal	Pre Coated Metal
Inner Tank	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel	Glassline Coated Steel
Heating Element	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat
Device Control	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	N.A.	N.A.	N.A.	N.A.
Function Display	Temperature Dial	Temperature Dial	Temperature Dial	Temperature Dial	N.A.	N.A.	N.A.	N.A.
Power & Heating Indicator	Neon	Neon	Neon	Neon	Neon	Neon	Neon	Neon
Tank Heat Loss Insulation	PUF	PUF	PUF	PUF	PUF	PUF	PUF	PUF
Tank Anti-Rust Device	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod
Max Pressure Rating (Bar)	8	8	8	8	8	8	8	8
Primary Overheat Protection	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Secondary Overheat Protection	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout
MFV (Over Pressure Protection)	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve
MFV (Vacuum Protection)	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve
MFV (Water Backflow Protection)	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve	Non-Return Valve
MFV (Tank Maintenance)	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve
Ingress Protection Rating	IPX4	IPX4	IPX4	IPX4	IPX1	IPX1	IPX1	IPX1
Available Colours	White	White	White	White	White	White	White	White
Dimension (mm)	Width	335	335	345	395	260	260	315
	Depth	310	310	320	370	245	245	300
	Height	410	500	510	565	410	495	500
Warranty (year)	Product	2	2	2	2	2	2	2
	Element	3	3	3	3	3	3	3
	Tank	7	7	7	7	7	7	7

STORAGE GLASSLINE



THERMOSLIM

STORAGE HPE TECHNOLOGY



MAVERICK+

STORAGE STAINLESS TANK



FONTUS+



AQUASPA+



ECOSWIFT+

Category	Storage (Glassline)	Storage (Glassline)	Storage (Polymer)	Storage (Polymer)	Storage (Polymer)	Storage (Polymer)	Storage (Polymer)	Storage (Polymer)
Model	Thermoslim	Thermoslim	Maverick+	Maverick+	Maverick+	Maverick+	Maverick+	Maverick+
Model No.	SWTP10HPGM2-LH/RH SWTP15HPGM2-LH/RH	SWTP25HPGM2-LH/RH SWTP50HPGM2-CM	SWMA06VMPBK2-GB	SWMA10VMPBK2-GB	SWMA15VMPBK2-GB	SWMA25VMPBK2-GB	SWBR35VMGM2	SWBR50VMGM2
Mounting Position	Horizontal	Horizontal	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Capacity (L)	10/15	25/50	6	10	15	25	35	50
BEE Star Rating	3	3	5	5	5	5	3	3
Rated Input Power (kW)	2	2	2	2	2	2	2	2
Outer Body	Powder Coated Metal	Powder Coated Metal	Powder Coated Metal	Powder Coated Metal	Powder Coated Metal	Powder Coated Metal	Powder Coated Metal	Powder Coated Metal
Inner Tank	Glassline Coated Steel	Glassline Coated Steel	HPE Technology	HPE Technology	HPE Technology	HPE Technology	HPE Technology	HPE Technology
Heating Element	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat
Device Control	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob
Function Display	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Power & Heating Indicator	Neon	Neon	LED	LED	LED	LED	LED	LED
Tank Heat Loss Insulation	PUF	PUF	PUF	PUF	PUF	PUF	PUF	PUF
Tank Anti-Rust Device	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod	Magnesium Anode Rod
Max Pressure Rating (Bar)	8	8	8	8	8	8	8	8
Primary Overheat Protection	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Secondary Overheat Protection	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout
MFV (Over Pressure Protection)	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve
MFV (Vacuum Protection)	Vacuum Releas Valve	Vacuum Releas Valve	Vacuum Releas Valve	Vacuum Releas Valve	Vacuum Releas Valve	Vacuum Releas Valve	Vacuum Releas Valve	Vacuum Releas Valve
MFV (Water Backflow Protection)	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve	Vacuum Release Valve
MFV (Tank Maintenance)	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve
Ingress Protection Rating	IPX4	IPX4	IPX2	IPX2	IPX2	IPX2	IPX2	IPX2
Available Colours	White	White	Grey	Grey	Grey	Grey	Grey	Grey
Dimension (mm)	Width	440/480	900/780	315	355	355	375	420
	Depth	325	325/400	300	340	340	360	400
	Height	315	315/465	354	382	472	542	740
Warranty (year)	Product	2	2	2	2	2	2	2
	Element	3	3	2	2	2	2	2
	Tank	7	7	5	5	5	5	5

Category	Storage (SS Tank)	Storage (SS Tank)	Storage (SS Tank)	Storage (SS Tank)	Storage (SS Tank)	Storage (SS Tank)
Model	Fontus+	Fontus+	Fontus+	Aquaspa+	Ecoswift+	Ecoswift+
Model No.	SWFT10VPS6K2-WW	SWFT15VPS6K2-WW	SWFT25VPS6K2-WW	SWAR06VPS6M2-WG	SWEF06VMS6M2-WB SWEF10VMS6M2-WB	SWEF15VMS6M2-WB SWEF25VMS6M2-WB
Mounting Position	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Capacity (L)	10	15	25	6	6/10	15/25
BEE Star Rating	4	4	4	3	4	4
Rated Input Power (kW)	2	2	2	2	2	2
Outer Body	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	Powder Coated Metal	Powder Coated Metal
Inner Tank	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Heating Element	Heavy Copper	Heavy Copper	Heavy Copper	Heavy Copper	Heavy Copper	Heavy Copper
Device Control	Temperature Control Knob	Temperature Control Knob	Temperature Control Knob	N.A.	N.A.	N.A.
Function Display	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Power & Heating Indicator	Neon	Neon	Neon	Neon	Neon	Neon
Tank Heat Loss Insulation	PUF	PUF	PUF	PUF	PUF	PUF
Tank Anti-Rust Device	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Max Pressure Rating (Bar)	6.5	6.5	6.5	6.5	6.5	6.5
Primary Overheat Protection	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Secondary Overheat Protection	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout
MFV (Over Pressure Protection)	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve
MFV (Vacuum Protection)	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
MFV (Water Backflow Protection)	Anti-Siphon Hole	Anti-Siphon Hole	Anti-Siphon Hole	Anti-Siphon Hole	Anti-Siphon Hole	Anti-Siphon Hole
MFV (Tank Maintenance)	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve	Drainage Valve
Ingress Protection Rating	IPX1	IPX1	IPX1	IPX1	IPX1	IPX1
Available Colours	White	White	White	White	White	White
Dimension (mm)	Width	315	355	365	270	275
	Depth	310	380	370	285	270
	Height	455	490	570	360	385/450
Warranty (year)	Product	2	2	2	2	2
	Element	2	2	2	2	2
	Tank	5	5	5	5	5

INSTANT WATER HEATER



RAPIDUS



PRIMUS



AURA PLUS



FONTUS



REVATTO

Category	Instant	Instant	Instant	Instant	Instant	Instant
Model Name	Rapidus	Primus	Aura Plus	Aura Plus	Fontus	Revatto
Model Code	IWRP55VPS6M3-WB	IWPM03VPS8M3-WW	IWAU03VPS8M3-WG IWAU03VPS8M4-WG	IWAU01VPS8M3-WG IWAU01VPS8M4-WG	IWFT03VPS6M3-WW	IWRV03VPS6M3-WW
Mounting Position	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Capacity (L)	5.5	3	3	1	3	3
Rated Input Power (kW)	3	3	3/4.5	3/4.5	3	3
Outer Body	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer	High-strength Polymer
Inner Tank	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Heating Element	Heavy Copper	Heavy Copper	Heavy Copper	Heavy Copper	Heavy Copper	Heavy Copper
Function Display	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Power & Heating Indicator	Neon	LED	LED	LED	Neon	Neon
3-Pin Moulded Plug	Yes	Yes	Yes	Yes	No	No
Tank Heat Loss Insulation	Glasswool	Glasswool	Glasswool	Glasswool	Glasswool	Glasswool
Max Pressure Rating (Bar)	6.5	8	8	8	6.5	6.5
Over Pressure Protection	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve	Pressure Release Valve
Primary Overheat Protection	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Secondary Overheat Protection	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout	Thermal Cutout
Ingress Protection Rating	IPX1	IPX1	IPX1	IPX1	IPX1	IPX1
Available Colours	White-Blue	White	White-Grey	White-Grey	White	White
Dimension (mm)	Width	250	230	218	180	185
	Depth	225	210	190	160	220
	Height	445	365	332	280	185
Warranty (year)	Product	2	2	2	2	2
	Element	2	2	2	2	2
	Tank	5	5	5	5	5

GAS WATER HEATER



ORIENT BAHUBALI

Category	Gas	
Model	Orient Bahubali	
Model No.	GWBB06VML8KN-WG	
Mounting Position	Vertical	
Hot Water Output (Litres Per Minute)	6	
Outer Body	Powder Coated Metal	
Burner	Stainless Steel	
Heat Exchanger	Tin Plated Copper	
Solenoid Valve	Single	
Function Display	N.A.	
Gas Flow Control	Manual Knob	
Water Flow Control	Manual Knob	
Temperature Mode	Summer / Winter	
Power Indicator	Neon	
Max Water Pressure Rating (Bar)	8	
Primary Overheat Protection	Thermal Cut-out	
Overheat Protection Timer	20 Minute Auto Off	
Gas Leakage Protection	Flame Failure Device	
Accidental Ignition Protection	Safety On/Off Switch	
Scaling & Blockage Prevention	Inlet Mesh	
Available Colours	White	
Dimension (mm)	Length	290
	Width	140
	Height	490
Warranty (Product) year	2	

IMMERSION RODS



ARC PLUS



HOT STAR

Category	Immersion	Immersion	Immersion	Immersion
Model Name	Arc Plus	Arc Plus	Hot Star	Hot Star
Model No.	IM10AP	IM15AP	IM10HS	IM15HS
Rated Input Power (kW)	1	1.5	1	1.5
Outer Body	Shockproof PBT Polymer	Shockproof PBT Polymer	Bakelite	Bakelite
Heating Element	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat	Heavy Copper with Nickel Coat
Power Indicator	N.A.	N.A.	Neon	Neon
Water Level Indicator	Yes	Yes	Yes	Yes
Handle & Bucket Clip	Yes	Yes	Yes	Yes
Power Cord (metre)	1.6	1.6	1.6	1.6
Power Plug	6 Amp, 3-Pin ISI Certified	16 Amp, 3-Pin ISI Certified	6 Amp, 3-Pin ISI Certified	16 Amp, 3-Pin ISI Certified
Available Colours	White-Blue	White-Blue	Black	Black
Dimension (mm)	Width	74	74	75
	Depth	67	67	65
	Height	360	360	360
Replacement Warranty (Product) year	2	2	2	2

BRANCH OFFICES

NORTH REGION

Head Office: 240, Okhla Industrial Estate Phase III, New Delhi 110020, **Delhi:** 62, Okhla Industrial Estate Phase III, New Delhi 110020, **Chandigarh:** 840, First Floor, PAC Manimajara, UT Chandigarh - 160101, **Rajasthan:** C-176 road number 9J, V.K.I. Area Jaipur - 302013, **Uttar Pradesh:** 607, 6th floor, Ratan Square Marg, Lucknow - 226001, **Noida:** C-130, Sector 63, Noida - 201301.

EAST REGION

Assam: Nilakshi Talukdar Campus, Opp Vodafone Head Office, P.H - 37, Katabari, Guwahati - 781035, **Bihar:** 4th Floor, Sai Tower, beside Hotel Utsav, New Dak Bungalow Road. Patna - 800001, **Jharkhand:** Modi Heights, Phase-1, 4th Floor, Office no. 401, Ratu Road, Near Durga Mandir Ranchi - 834001, **Odisha:** Badadhanpur, Puri Bypass Road, Bhubaneswar - 751002, **West Bengal:** 6, Ghore Bibi Lane, Behind Swabhumi, Kolkata - 700054.

SOUTH REGION

Telangana: 6-3-1090/C, R K Plaza, 2nd Floor, Raj Bhawan Road, Somajiguda, Hyderabad - 500082, **Chennai:** Heavytrees' 2nd Floor, Unit - B, no. 47, Spur Tank Road, Chetpet, Chennai - 600031, **Karnataka:** SY no. 73, Harokyathanahalli Dasanapura Hobli, Makali post Tumkur main road Bangalore - 562162, **Kerala:** Kollamkuzhi Business Square, 5th Floor, P.H bypass, Vyttila, Cochin - 682019.

WEST REGION

Chhattisgarh: G.D. Warehousing, Opp. Reliance Petrol Pump Ring Road no. 2, Gondwara, Raipur - Chhattisgarh, India. - 493221, **Gujarat:** Survey no. 107 village Jetalpur, near Gokulesh Rice Milltaluka Dascroi P.H 8 Ahmedabad - 382426, **Madhya Pradesh:** Survey no. 275/1/1, Kelodhala, SDA Compound, Dewas Naka Indore - 452010, **Mumbai:** 604, 6th Floor, Dev Corpora, Cadbury Junction, Eastern Express Highway, Thane (West), Mumbai - 400601, **Pune:** Gate no. 173 Wade Bolhai road Vill Kesnand Tal Gaveli Dist Pune - 412207, **Nagpur:** Shriyash Heights, Block no. 402, 4th Floor, Plot no. 95, Lendra West Precinct, Ramdaspath, Nagpur - 440010.



switch to smart

Fans • Home Appliances • Lighting • Switchgear

Orient Electric Limited

(a CK Birla Group company)
240, Okhla Industrial Estate, Phase-III,
New Delhi-110020

Orient Helpline No.: 1800 103 7574 (Toll-Free)

Email: customer.connect@orientelectric.com

Website: www.orientelectric.com

Follow us on:     

Smart Care

1800 103 7574

Authorized Service Center



*Orient Electric Limited (OEL) is the registered proprietor of the designs in respect of the products featured in this catalogue. OEL is the owner of all intellectual property in respect of the products featured in this catalogue. Any unauthorized manufacturing/selling/distribution/marketing of any of the products featured in this catalogue or any act of manufacturing/selling/distributing/marketing any products which are identical to/similar to or (fraudulent imitations) of the products featured in this catalogue would amount to infringement of OEL's Intellectual Property Rights for which OEL will initiate appropriate legal action.